


## Pinout for DRA series to Kenwood style HT connector

This diagram is for a cable to connect a DRA series interface with a DB9 connector to a Kenwood style HT speaker/mic connector. The colors shown are for the conductors in a Baofeng earpiece cable that comes with the radio. The cable was cut at the radio side of the mic/PTT button. Separate plugs can be used for the HT connection. Always verify the pinout and wire colors of any cable used.

DRA-65 TO HT'S

SAME FOR DRA-30

BAOFENG, ANYTONE, KENWOOD STYLE SPKR MIC PLUG

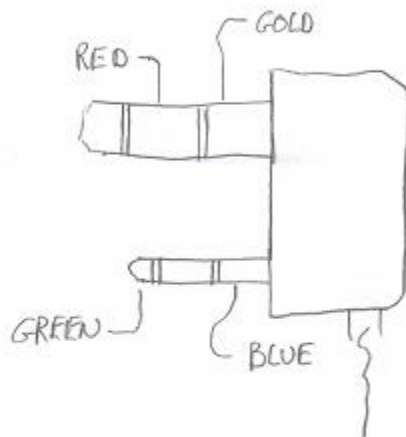

COLORS ARE FROM  
BAOFENG EARPIECE CABLE

PLUG	DB9 PIN	FUNCT.
RED	1	AUDIO FROM COMP. TO RADIO
GOLD	3	PTT
BLUE	6	GROUND
GREEN	5	AUDIO FROM RADIO TO COMP.